

PRODUCT FAMILY DATASHEET

HALOPAR 30

Halogen lamps with parabolic reflector PAR30, with screw base



AREAS OF APPLICATION

- General illumination
- Workplace lighting
- Kitchen lighting
- Object lighting
- Accent lighting
- Shops
- Restaurants, hotels and similar prestigious applications

PRODUCT BENEFITS

- Brilliant accent light
- With whole glass reflector for brilliant lighting effects
- Instant 100 % light, no warm-up time
- Approved for use in open luminaires (to IEC 60598-1)
- Contains no mercury
- UV filter

PRODUCT FEATURES




- Average life: 2,000 h
- 100 % dimmable
- Perfect color rendering (R_a : 100)
- Color temperature: 2,900 K

TECHNICAL DATA

Product description	Electrical data				Photometrical data				Light technical data		
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Color temperature	Color rendering index Ra	Nominal useful luminous flux 90°	Lumen main.fact.at end of nom.life time	Beam angle	Starting time	Warm-up time (60 %)
HALOPAR 30 75 W 230 V 10° E27 ¹⁾	75.00 W	230 V	75.00 W		2900 K	100			10 °	0.0 s	
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	75.00 W	230 V	75.00 W	1.00	2900 K	100	650 lm	0.75	30 °	0.0 s	0.00 s
HALOPAR 30 75 W 240 V 30° E27 ¹⁾	75.00 W	240 V	75.00 W		2900 K	100			30 °	0.0 s	
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	75.00 W	230 V	75.00 W		2900 K	100			30 °	0.0 s	
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	75.00 W	230 V	75.00 W	1.00	2900 K	100	650 lm	0.75	30 °	0.0 s	

Product description	Dimensions & weight		Additional product data			Capabilities		Country-specific categorizations
	Diameter	Overall length	Base (standard designation)	Mercury-free	Mercury content	Burning position	Dimmable	ILCOS
HALOPAR 30 75 W 230 V 10° E27 ¹⁾	97.0 mm	90.5 mm	E27	Yes		Any	Yes	HAGS/UB-75-230-E27-97/10
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	97.0 mm	90.5 mm	E27	Yes	0.0 mg	Any	Yes	HAGS/UB-75-240-E27-97/30
HALOPAR 30 75 W 240 V 30° E27 ¹⁾	97.0 mm	90.5 mm	E27	Yes		Any	Yes	HAGS/UB-75-240-E27-97/30
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	97.0 mm	90.5 mm	E27	Yes		Any	Yes	HAGS/UB-75-230-E27-97/30
HALOPAR 30 75 W 230 V 30° E27 ¹⁾	97.0 mm	90.5 mm	E27	Yes	0.0 mg	Any	Yes	HAGS/UB-75-230-E27-97/30

¹⁾ Not suitable for outdoor use or damp conditions/Banned from 1.9.2016 as per EU phase-out plan

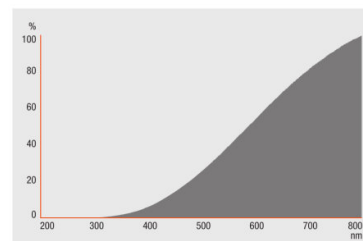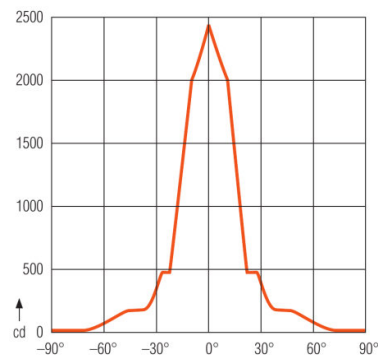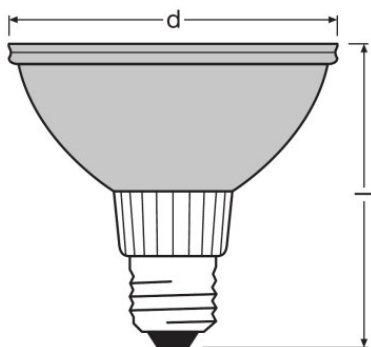

HALOPAR 30 75 W 230 V 10° E27,
 HALOPAR 30 75 W 230 V 30° E27,
 HALOPAR 30 75 W 240 V 30° E27,
 HALOPAR 30 75 W 230 V 30° E27,
 HALOPAR 30 75 W 230 V 30° E27

HALOPAR 30 75 W 230 V 30° E27

HALOPAR 30 75 W 230 V 10° E27,
 HALOPAR 30 75 W 230 V 30° E27,
 HALOPAR 30 75 W 240 V 30° E27,
 HALOPAR 30 75 W 230 V 30° E27,
 HALOPAR 30 75 W 230 V 30° E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300338460	HALOPAR 30 75 W 230 V 10° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm ³	3480.00 g
4050300338484	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm ³	3540.00 g
4050300435367	HALOPAR 30 75 W 240 V 30° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm ³	3540.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300338507	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	521 mm x 193 mm x 336 mm	33.79 dm ³	3540.00 g
4008321207999	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	525 mm x 175 mm x 340 mm	31.24 dm ³	3927.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.