

# PRODUCT DATASHEET

## P MR11 20 36° 2.6 W/2700K GU4

PARATHOM MR11 12 V DIM | LED SUPERSTAR PIN G4 12 V DIM



---

### AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Exhibition rooms
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Very long lifetime of up to 25,000 h
- Low energy consumption
- Easy relamping thanks to compact design and GU4 base
- Instant 100 % light, no warm-up time

---

### PRODUCT FEATURES

- Professional LED alternative to halogen MR11 lamps
- Good color rendering index  $R_a: \geq 80$
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Mercury-free lamps



**TECHNICAL DATA**

## Electrical data

<b>Rated wattage</b>	2.60 W
<b>Nominal wattage</b>	2.60 W
<b>Nominal voltage</b>	12 V
<b>Claimed equiv. conventional lamp power</b>	20 W
<b>Operating frequency</b>	50...60 Hz
<b>Power factor <math>\lambda</math></b>	> 0.50


## Photometrical data

<b>Luminous intensity [PIM]</b>	400 cd
<b>Nominal luminous flux</b>	184 lm
<b>Rated luminous flux</b>	184 lm
<b>Rated color temperature</b>	2700 K
<b>Lumen main.fact.at end of nom.life time</b>	0.70
<b>Light color (designation)</b>	Warm White
<b>Color temperature</b>	2700 K
<b>Luminous flux</b>	184 lm
<b>Color rendering index Ra</b>	$\geq 80$
<b>Standard deviation of color matching</b>	$\leq 6$ sdc <sub>m</sub>
<b>Color rendering index Ra</b>	$\geq 80$
<b>Nominal useful luminous flux 90°</b>	184 lm
<b>Rated useful luminous flux 90°</b>	184 lm
<b>Rated peak intensity</b>	400 cd

## Light technical data

<b>Beam angle</b>	36 °
<b>Warm-up time (60 %)</b>	< 0.50 s
<b>Starting time</b>	< 0.5 s
<b>Nominal beam angle</b>	36 °
<b>Rated beam angle (half peak value)</b>	36.00 °

### Dimensions & weight

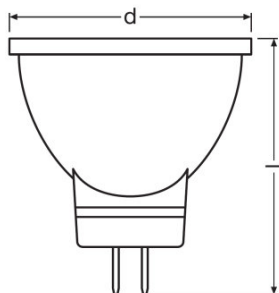

<b>Overall length</b>	38.0 mm
<b>Diameter</b>	35.0 mm
<b>Outer bulb</b>	MR35
<b>Length</b>	38.0 mm
<b>Maximum diameter</b>	35.0 mm

### Temperatures & operating conditions

<b>Maximum temperature at tc test point</b>	83 °C
---	-------

### Lifespan

<b>Nominal lamp life time</b>	25000 h
<b>Rated lamp life time</b>	25000 h
<b>Number of switching cycles</b>	100000

### Additional product data

<b>Base (standard designation)</b>	GU4
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

<b>Dimmable</b>	Yes
-----------------	-----

### Certificates & standards



<b>Energy efficiency class</b>	A+
--------------------------------	----

<b>Energy consumption</b>	3 kWh/1000h
---------------------------	-------------

Country-specific categorizations

<b>ILCOS</b>	DRR-3,3/827-12-GU4-35/36
<b>Order reference</b>	LPMR11D2036 2,6

Light Distribution

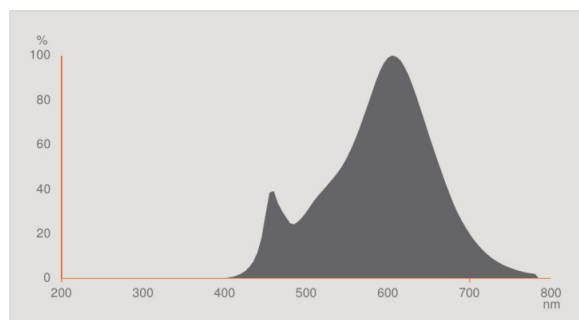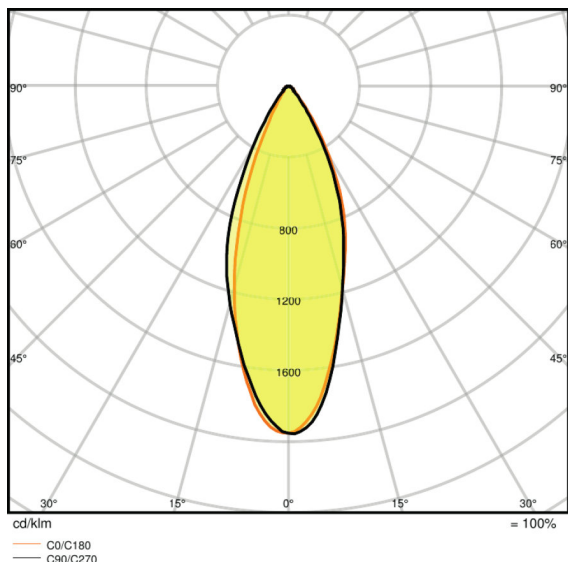

LDC typ polar

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075813458	Folding carton box 1	36 mm x 36 mm x 46 mm	21.00 g	0.06 dm <sup>3</sup>
4058075813465	Shipping carton box 10	188 mm x 78 mm x 55 mm	238.00 g	0.81 dm <sup>3</sup>
4058075031142	Shipping carton box 80	201 mm x 169 mm x 240 mm		8.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For further products and actual information concerning LED lamps see  
 ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

Further information see

- ▶ [www.ledvance.com/low-voltage-ledlamps](http://www.ledvance.com/low-voltage-ledlamps)

For dimming conformity see

- ▶ [www.ledvance.com/dim](http://www.ledvance.com/dim)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.