




Pendant Luminaires | 220-240 V | 1xR7s  
4536

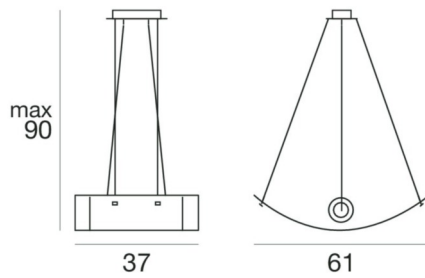

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 160 W
Lamp cap	1 x R7s
Frequency	50-60 Hz
Optic	Diffused
Light emission direction	downward
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Iron
Colour	nickel
Processing	Electroplating

Finishing diffuser	
Material	Glass - Glass
Colour	white - amber
Processing	Sandblasting - Sandblasting

Finishing mounting frame	
Material	Iron
Colour	nickel
Processing	Electroplating



Pendant Luminaires | 220-240 V | 1xR7s  
**4536**

Single emission pendant luminaires for indoor application. Halogen lamp included 160W, lamp cap 1xR7s.

The device body is made of iron and features a nickel finish, processed by means of electroplating; the diffuser is made of glass with a sandblasting treatment; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a nickel finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 7.130 kg.

The device features protection class I and can be ceiling-mounted.

#### **Illuminotechnical Features**

Luminous flux (source)	3100 lm
Colour temperature	2950 K
Colour rendering index	100 Ra