


# Entourage\_P1



Pendant Luminaires | 220-240 V | arrayLED 28 W 700 mA | CRI 90 | Warm Tune  
7696



Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	28 W
Luminous flux (source)	1790 lm
Frequency	60 - 50 Hz
CCT / Tonalità	Warm Tune
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	Phase cut
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	PE
Colour	rust
Processing	Coating

Finishing diffuser	
Material	PMMA
Colour	opaline
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	corten
Processing	Coating



Pendant Luminaires | 220-240 V | arrayLED 28 W 700 mA | CRI 90 | Warm Tune  
7696

Single emission pendant luminaires for indoor application. The warm tune LED light source with a general lighting light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1790 lm, with a 63.9 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of pe and features a rust finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a corten finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 9.070 kg. The power supply driver is included in the delivery.



The total absorbed power is 28 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	64 %
Luminous flux (source)	1790 lm
Luminaire luminous flux	1150 lm
Consumption	28 W
Luminaire efficacy	41 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	118°
Ottica C90/C270	113°

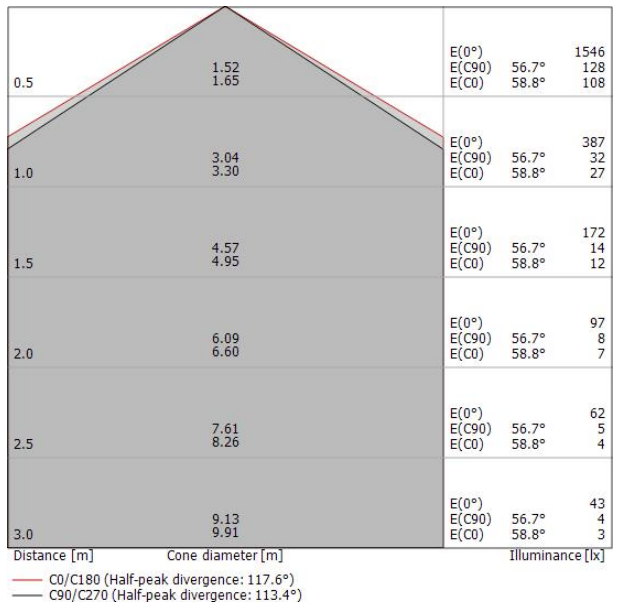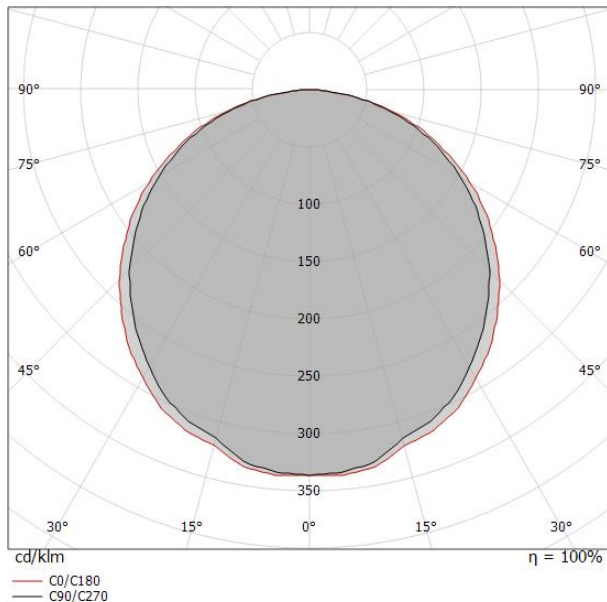



Entourage\_P1 | Pendant Luminaires | Accessories  
7696



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026



Dimmer  
Bluetooth, 85-240V

**Code**  
KIT0080