




Wall Lights | 220-240 V | topLED 21 W 350 mA | CRI 90
7447

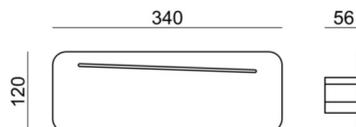

Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	upward
Power	21 W
Luminous flux (source)	2505 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.685 Kg

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PC
Processing	Sandblasting

Wall Lights | 220-240 V | topLED 21 W 350 mA | CRI 90
7447

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 24 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2505 lm, with a 119.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 1.685 kg. The power supply driver is included in the delivery.

The total absorbed power is 21 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	62 %
Luminous flux (source)	2505 lm
Luminaire luminous flux	1558 lm
Consumption	21 W
Luminaire efficacy	74 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

