


Spotty_S



Ceiling Lights | 220-240 V | 4xGU10
1155

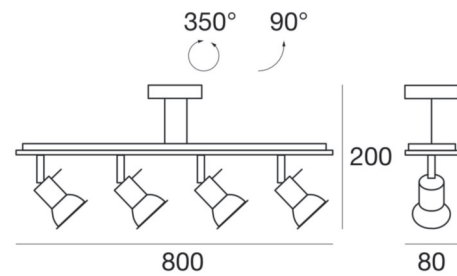

| Technical data | |
|--|------------------|
| Installation position | Ceiling |
| Installation environment | Indoor |
| Lamp cap | 4 x GU10 Max |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | downward |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Induzione | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | Yes |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Net weight | 2.335 Kg |

| Finishing casing | |
|------------------|-------------|
| Materiale lega | Glass |
| Colour | transparent |

| Finishing mounting frame | |
|--------------------------|-----------|
| Materiale lega | Aluminium |
| Colour | neutral |



Ceiling Lights | 220-240 V | 4xGU10
1155

Single emission ceiling lights for indoor application. Compatibility: LED lamp, halogen 42 W; lamp cap 4xGU10.

The device body is made of glass and features a transparent finish; the mounting frame is made of aluminium, with a neutral finish. The ingress protection degree is IP20; the total weight is of 2.335 kg.

The device features protection class I and can be ceiling-mounted.

| Illuminotechnical Features | |
|-----------------------------------|---------|
| Luminous flux (source) | 1200 lm |
| Colour temperature | 2800 K |
| Colour rendering index | 100 Ra |