



Oh!_FL65



Floor Lamp | 220-240 V | topLED 15 W 350 mA | CRI 90
15191



Ø 380

| Technical data | |
|------------------------------------------------|------------------|
| Type | Floor Lamp |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | upward |
| Power | 15 W |
| Luminous flux (source) | 1893 lm |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 3000 K |
| Colour rendering index | 90 Ra |
| AC / DC | AC-DC |
| Safety class | 2 |
| IP | IP65 |
| IK | IK10 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Driver included | Driver |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 5 m |
| Electric socket | Type F |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 2.600 Kg |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |



Floor Lamp | 220-240 V | topLED 15 W 350 mA | CRI 90
15191

Double emission floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1893 lm, with a 126.2 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 2.600 kg.


The total absorbed power is 15 W. The power supply cable is included and features.


The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 83 % |
| Luminous flux (source) | 1893 lm |
| Luminaire luminous flux | 1587.87 lm |
| Consumption | 15 W |
| Luminaire efficacy | 105 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 19 |
| UGR axial | < 19 |


| OPTICAL | |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| C0/C180 optics | 178° |

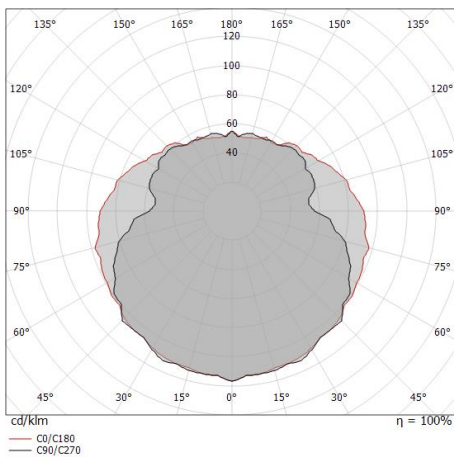




Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs

Code
14931



anti-theft - anti-theft ground fixing bracket

Code
14080



Connector

Code
14992