


# Oh!\_FL65



Floor Lamp | 220-240 V | topLED 27 W 700 mA | CRI 90  
15193



Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	27 W
Luminous flux (source)	3674 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
AC / DC	AC-DC
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Double emission
Net weight	7.940 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PE
Colour	neutral



Floor Lamp | 220-240 V | topLED 27 W 700 mA | CRI 90  
**15193**

Double emission floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3674 lm, with a 136.1 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 7.940 kg.


The total absorbed power is 27 W. The power supply cable is included and features.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	77 %
Luminous flux (source)	3674 lm
Luminaire luminous flux	2856 lm
Consumption	27 W
Luminaire efficacy	105 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16


OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	178°

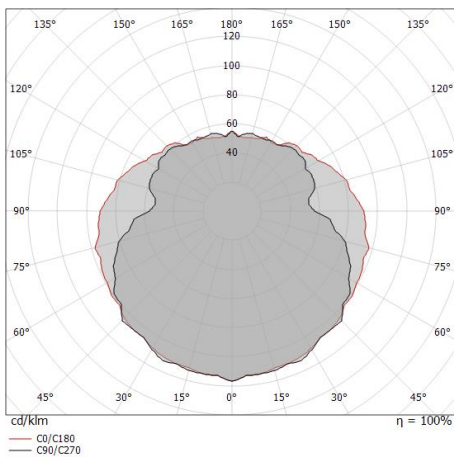




Outer casing - outer casing for installation on ground or on concrete

**Code**  
14930



Pegs - peg for ground mounting

**Code**  
14937



anti-theft - anti-theft ground fixing bracket

**Code**  
14082



Connector

**Code**  
14992