


# Snake\_W4



Wall Lights | 220-240 V | topLED 19 W 500 mA | CRI 90  
7857



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	frontal
Power	19 W
Luminous flux (source)	2182 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Dimmable article	Phase cut
Induction	No
Emergency mode	No
Motion sensor	No
Directional	Swivelling
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	3 Kg

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating
Finishing diffuser	
Material	PC
Processing	Sandblasting



Wall Lights | 220-240 V | topLED 19 W 500 mA | CRI 90  
7857

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2182 lm, with a 114.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 3 kg.



The total absorbed power is 19 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	54 %
Luminous flux (source)	2182 lm
Luminaire luminous flux	1188 lm
Consumption	20 W
Luminaire efficacy	59 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra


UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 19

OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	47°
C90/C270 optics	40°

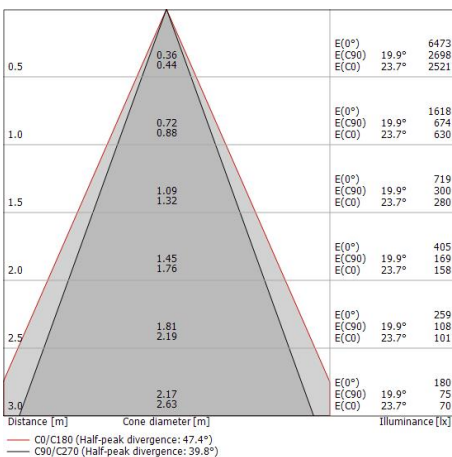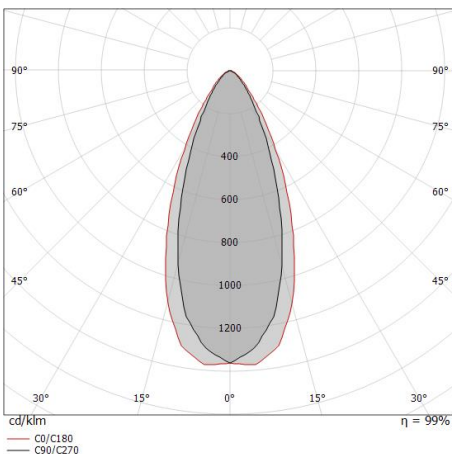



7857



Dimmer

PUSH DIM, 220-240V

**Code**

KIT0026