




Wall Lights | 220-240 V | 2xE14  
90258

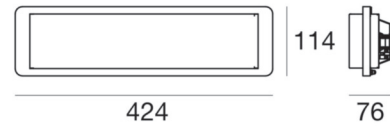

| Technical data                                 |                  |
|--|------------------|
| Type   | Surface          |
| Installation position                          | Wall lights      |
| Installation environment                       | Indoor           |
| Lamp cap                                       | 2 x E14 Max 46W  |
| Frequency                                      | 50-60 Hz         |
| Optics   | General Lighting |
| Light emission direction                       | frontal          |
| Safety class                                   | 1                |
| IP   | IP20             |
| Glow wire test                                 | 850°             |
| Direct mounting on normally flammable surfaces | Yes              |
| CE   | Yes              |
| ETL  | No               |
| Fire Rated (BS 476 PT21 compliant)             | No               |
| Induction                                      | No               |
| Emergency mode                                 | No               |
| Motion sensor                                  | No               |
| Directional                                    | No               |
| Tilting  | No               |
| Walk-over                                      | No               |
| Drive-over                                     | No               |
| Cable included                                 | No               |
| Resin potting                                  | No               |
| Type of light emission                         | Double emission  |

| Finishing casing |      |
|------------------|------|
| Material         | Wood |
| Colour           | oak  |

| Finishing diffuser |              |
|--------------------|--------------|
| Material           | Glass        |
| Colour             | white        |
| Processing         | Sandblasting |



Wall Lights | 220-240 V | 2xE14  
**90258**

Double emission wall lights for indoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 8 W; lamp cap 2xE14.

The device body is made of wood and features a oak finish; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of -- kg.

The device features protection class I and can be wall lights-mounted.

| <b>Illuminotechnical Features</b> |         |
|-----------------------------------|---------|
| Luminous flux (source)            | 1400 lm |
| Colour temperature                | 2500 K  |
| Colour rendering index            | 100 Ra  |