


Pendant Luminaires | 220-240 V | 1xE27
10107

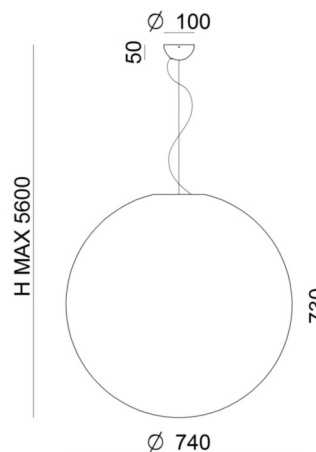

| Technical data | |
|--|------------------|
| Type | Surface |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Lamp cap | 1 x E27 Max 57W |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | downward |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 7.330 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing casing | |
|------------------|-------|
| Material | PE |
| Colour | white |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |

Pendant Luminaires | 220-240 V | 1xE27
10107

Double emission pendant luminaires for indoor application. Compatibility: LED lamp, halogen 57 W, compact fluo 30 W; lamp cap 1xE27.

The device body is made of pe and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, processed by means of coating. The ingress protection degree is IP20; the total weight is of 7.330 kg.

The device features protection class I and can be ceiling-mounted.

| Illuminotechnical Features | |
|----------------------------|---------|
| Light Output Ratio (LOR) | 77 % |
| Luminous flux (source) | 915 lm |
| Luminaire luminous flux | 712 lm |
| Consumption | 57 W |
| Luminaire efficacy | 16 lm/W |
| Colour rendering index | 100 Ra |

| OPTICAL | |
|-----------------------------|-------------|
| Light distribution symmetry | Symmetrical |
| C0/C180 optics | 180° |

