


Oh! Smash_FL



Floor Lamp | 220-240 V | 1xE27
10218

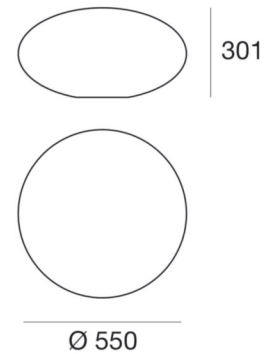

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Lamp cap	1 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	upward
Safety class	2
IP	IP20
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.865 Kg

Finishing diffuser	
Material	PE
Colour	neutral



Floor Lamp | 220-240 V | 1xE27
10218

Single emission floor lamp for indoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.865 kg.


. The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	82 %
Luminous flux (source)	700 lm
Luminaire luminous flux	577 lm
Consumption	46 W
Luminaire efficacy	15 lm/W
Colour rendering index	100 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	176°

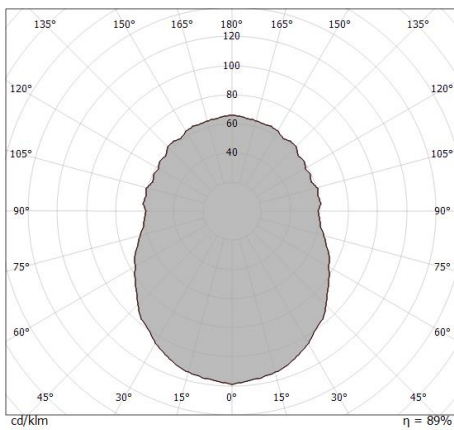

cd/km
 — C0/C180
 — C90/C270

0.5	28.64	E(0°) E(C0)	88.0°	333 0
1.0	57.27	E(0°) E(C0)	88.0°	83 0
1.5	85.91	E(0°) E(C0)	88.0°	37 0
2.0	114.55	E(0°) E(C0)	88.0°	21 0
2.5	143.18	E(0°) E(C0)	88.0°	13 0
3.0	171.82	E(0°) E(C0)	88.0°	9 0

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0/C180 (Half-peak divergence: 176.0°)