



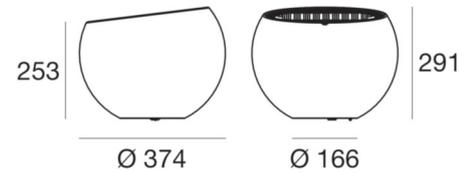

Floor Lamp | 1 x powerLED 2,0 W 350 mA
15120



| Technical data | |
|--|------------------|
| Type | Floor Lamp |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward |
| Power | 2 W |
| Luminous flux (source) | 120 lm |
| Current intensity | 350mA |
| Frequency | 50-60 Hz |
| CCT / Tone | 4000 K |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP65 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Driver included | No |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |



Floor Lamp | 1 x powerLED 2,0 W 350 mA
15120

Double emission floor lamp for outdoor application. The -- LED light source with a general lighting light distribution is composed of 1 powered LEDS with CCT of 4000 K and a CRI --; the source luminous flux is 120 lm, with a 60.0 lm/W nominal luminous efficacy.


The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2,0 W.

The device features protection class III and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).


Illuminotechnical Features

| | |
|---------------------------------------|----------------|
| Luminous flux (source) | 120 lm |
| Colour temperature | 4000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |




Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs
installation position: terreno,Cover material: pc

Code
14931



anti-theft - anti-theft ground fixing bracket

Code
14080