



Oh!_FL65



Floor Lamp | 220-240 V | 1xE27
15166

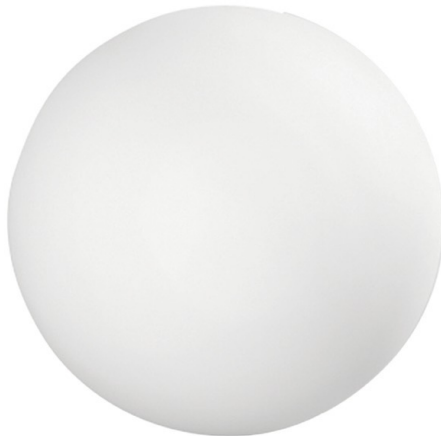

Ø 1150

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light emission direction	upward
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Double emission
Net weight	16.700 Kg

Finishing diffuser	
Material	PE
Colour	neutral



Floor Lamp | 220-240 V | 1xE27
15166

Double emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 77 W, compact fluo 30 W; lamp cap 1xE27.


The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 16.700 kg.

. The power supply cable is included and features.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	77 %
Luminaire luminous flux	1480 lm
Consumption	30 W
Luminaire efficacy	63 lm/W
Colour rendering index	100 Ra

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°

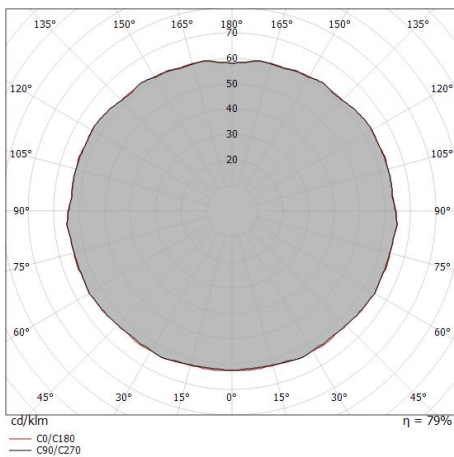




Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs - peg for ground mounting

Code
14937



anti-theft - anti-theft ground fixing bracket

Code
14083



Connector

Code
14992