


# Oh!\_S65



Ceiling Lights | 220-240 V | 1xE27  
15181

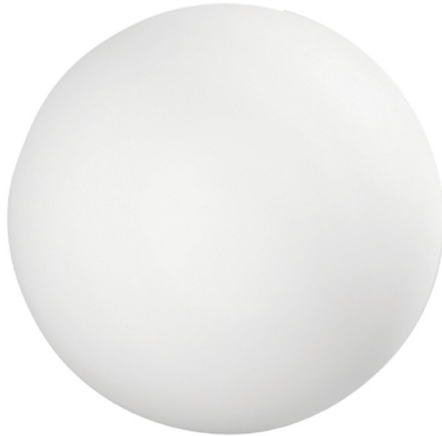

| Technical data                                 |                       |
|--|-----------------------|
| Type   | Surface               |
| Installation position                          | Wall lights - Ceiling |
| Lamp cap                                       | 1 x E27 Max 30W       |
| Frequency                                      | 50-60 Hz              |
| Optics   | General Lighting      |
| Light emission direction                       | frontal               |
| Safety class                                   | 2                     |
| IP   | IP65                  |
| IK   | IK10                  |
| Glow wire test                                 | 650°                  |
| Direct mounting on normally flammable surfaces | Yes                   |
| CE   | Yes                   |
| ETL  | No                    |
| Fire Rated (BS 476 PT21 compliant)             | No                    |
| Induction                                      | No                    |
| Emergency mode                                 | No                    |
| Motion sensor                                  | No                    |
| Directional                                    | No                    |
| Tilting  | No                    |
| Walk-over                                      | No                    |
| Drive-over                                     | No                    |
| Cable included                                 | No                    |
| Resin potting                                  | No                    |
| Type of light emission                         | Double emission       |
| Net weight                                     | 1.050 Kg              |

| Finishing diffuser |         |
|--------------------|---------|
| Material           | PE      |
| Colour             | neutral |

Ceiling Lights | 220-240 V | 1xE27  
**15181**

Double emission ceiling lights Compatibility: LED lamp, compact fluo 14 W, halogen 30 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 1.050 kg.

The device features protection class II and can be wall lights or ceiling-mounted.

| Illuminotechnical Features  |             |
|-----------------------------|-------------|
| Light Output Ratio (LOR)    | 77 %        |
| Luminous flux (source)      | 405 lm      |
| Luminaire luminous flux     | 623 lm      |
| Consumption                 | 14 W        |
| Luminaire efficacy          | 57 lm/W     |
| Colour rendering index      | 100 Ra      |
| OPTICAL                     |             |
| Light distribution simmetry | Symmetrical |
| C0/C180 optics              | 180°        |

