



Oh! Smash_P65



Pendant Luminaires | 220-240 V | 1xE27
15213

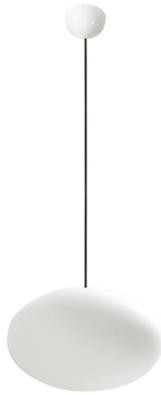

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Lamp cap	1 x E27 Max 30W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	2.440 Kg

Finishing diffuser	
Material	PE
Colour	translucent



Pendant Luminaires | 220-240 V | 1xE27
15213

Single emission pendant luminaires for outdoor application.


Compatibility: LED lamp, halogen 30 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 2.440 kg.

and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	82 %
Luminous flux (source)	405 lm
Luminaire luminous flux	334 lm
Consumption	30 W
Luminaire efficacy	13 lm/W
Colour rendering index	100 Ra

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	176°

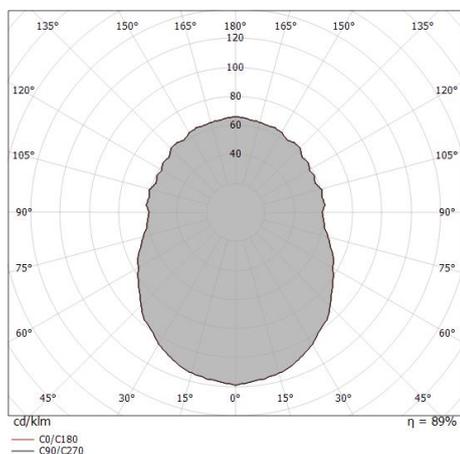

0.5	28.64	E(0°) E(C0)	88.0°	193 0
1.0	57.27	E(0°) E(C0)	88.0°	48 0
1.5	85.91	E(0°) E(C0)	88.0°	21 0
2.0	114.55	E(0°) E(C0)	88.0°	12 0
2.5	143.18	E(0°) E(C0)	88.0°	8 0
3.0	171.82	E(0°) E(C0)	88.0°	5 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 176.0°)