

Oh!_FL65



Floor Lamp | 220-240 V | 1xE27
15160



Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Lamp cap	1 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	upward
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Single emission
Net weight	2.000 Kg

Finishing diffuser	
Material	PE
Colour	neutral

Floor Lamp | 220-240 V | 1xE27
15160


Single emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 2.000 kg.

. The power supply cable is included and features.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).


Illuminotechnical Features	
Light Output Ratio (LOR)	77 %
Luminous flux (source)	700 lm
Luminaire luminous flux	958 lm
Consumption	20 W
Luminaire efficacy	61 lm/W
Colour rendering index	100 Ra
OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°

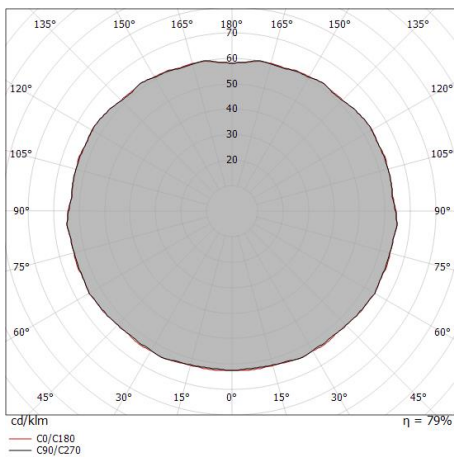




Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs

Code
14931



anti-theft - anti-theft ground fixing bracket

Code
14080



Connector

Code
14992