



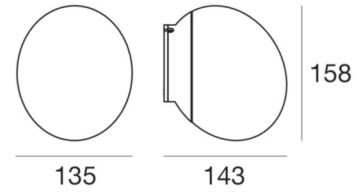

Wall Lights | topLED 4 W 150 mA | CRI 80  
7241



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling
Installation environment	Indoor - Outdoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	4 W
Source lumens	400 lm
Frequency	50-60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
Safety class	1
IP	IP44
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	0.800 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	Glass
Colour	white
Processing	Coating

Electronics	
	012000395000 Controller

Wall Lights | topLED 4 W 150 mA | CRI 80  
7241

Double emission wall lights for indoor or outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 400 lm, with a 100.0 lm/W nominal luminous efficacy.

The diffuser is made of glass with a coating treatment; the mounting frame is made of PC, with a white finish, processed by means of satin finishing. The ingress protection degree is IP44; the total weight is of 0.800 kg.

The total absorbed power is 4 W.

The device features protection class I and can be wall lights or ceiling-mounted.

#### Illuminotechnical Features

Light Output Ratio (LOR)	84 %
Source lumens	400 lm
Delivered lumens	338 lm
Consumption	7 W
Luminaire efficacy	48 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

#### LED Life / Failure Ratio

L70 B20 C0 72.5h

#### OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	180°

