


# Mongolfier\_P3



Pendant Luminaires | 220-240 V | arrayLED 28 W 700 mA | CRI 90 | Warm Tune  
8149

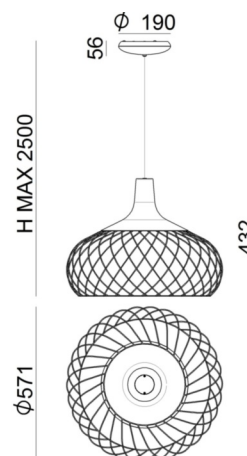

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	28 W
Luminous flux (source)	2430 lm
Frequency	60 - 50 Hz
CCT / Tonaltà	Warm Tune
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	Phase cut
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Iron
Processing	Electroplating

Finishing diffuser	
Material	PMMA
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Processing	Electroplating



Pendant Luminaires | 220-240 V | arrayLED 28 W 700 mA | CRI 90 | Warm Tune  
**8149**

Single emission pendant luminaires for indoor application. The warm tune LED light source with a general lighting light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2430 lm, with a 86.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of iron, processed by means of electroplating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, processed by means of electroplating. The ingress protection degree is IP20; The power supply driver is included in the delivery.

The total absorbed power is 28 W.

The device features protection class I and can be ceiling-mounted.

#### **Illuminotechnical Features**

Luminous flux (source)	2430 lm
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026



Dimmer  
Bluetooth, 85-240V

**Code**  
KIT0080