


2Nights_W2



Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7943



| Technical data | |
|--|----------------|
| Designer | Davide Oppizzi |
| Installation position | Wall lights |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | Flood |
| Light emission direction | upward |
| Power | 4 W |
| Luminous flux (source) | 363 lm |
| Frequency | 50 - 60 Hz |
| CCT / Tonalità | 3000 K |
| Colour rendering index | 90 Ra |
| Safety class | 1 |
| IP | IP20 |
| Optical compartment IP | IP40 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Driver included | Yes |
| Induzione | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | Yes |
| Tilting | Yes |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |

| Finishing casing | |
|------------------|----------------|
| Material | Aluminium |
| Colour | Rose Gold |
| Processing | Electroplating |

| Finishing diffuser | |
|--------------------|-------|
| Material | PC |
| Colour | amber |

| Finishing mounting frame | |
|--------------------------|-------------------------|
| Material | Aluminium |
| Colour | embossed white RAL 9003 |
| Processing | Coating |



Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7943

Single emission wall lights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 363 lm, with a 90.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a rose gold finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0,872 kg. The power supply driver is included in the delivery.



The total absorbed power is 4 W.

The device features protection class I and can be wall lights-mounted.

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 42 % |
| Luminous flux (source) | 363 lm |
| Luminaire luminous flux | 156.07 lm |
| Consumption | 4 W |
| Luminaire efficacy | 39 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 28 |
| UGR axial | < 28 |

| OPTICAL | |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| Ottica C0/C180 | 69° |

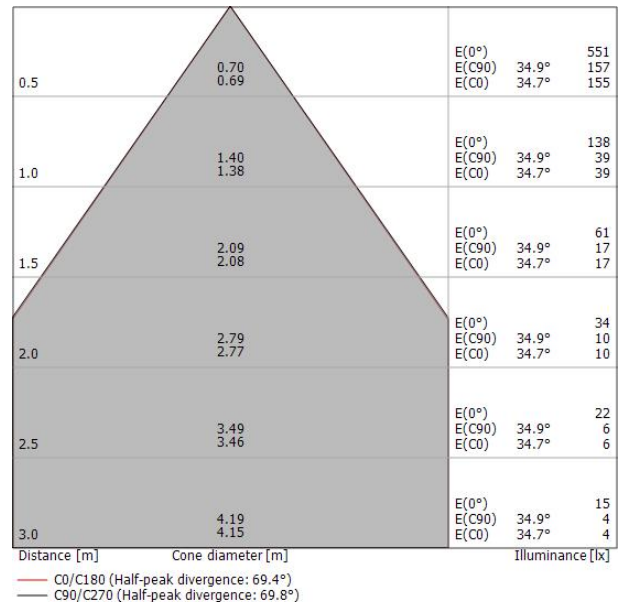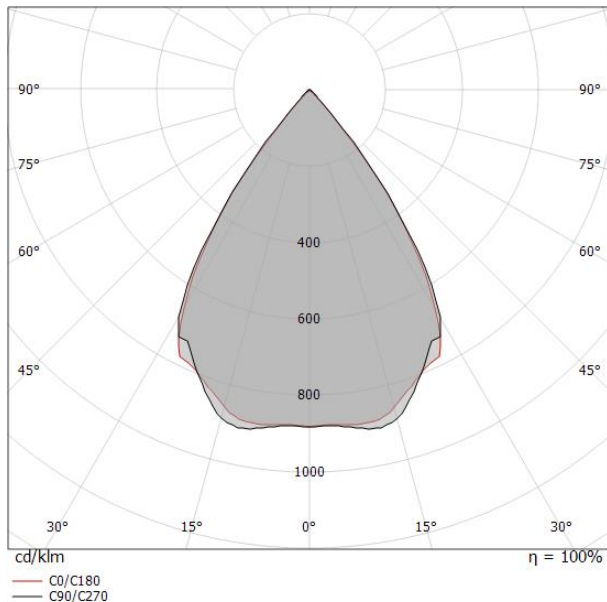



Diffuser

Code

KIT0035



Diffuser

Code

KIT0055



Diffuser

Code

KIT0057