


Cupolè_P



Pendant Luminaires | 220-240 V | 1xR7s
6312

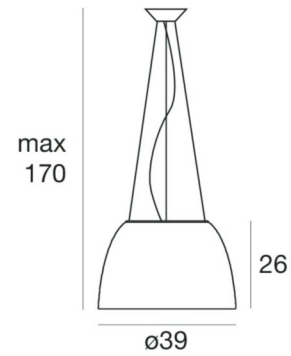

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 160 W
Lamp cap	1 x R7s
Frequency	50-60 Hz
Optic	Diffused
Light emission direction	downward
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing

Material	Iron
Colour	nickel
Processing	Electroplating

Finishing diffuser

Material	Glass
Colour	wenge

Finishing mounting frame

Material	Iron
Colour	nickel
Processing	Electroplating



Pendant Luminaires | 220-240 V | 1xR7s
6312

Double emission pendant luminaires for indoor application. Halogen lamp included 160W, lamp cap 1xR7s.

The device body is made of iron and features a nickel finish, processed by means of electroplating; the diffuser is made of glass; the mounting frame is made of iron, with a nickel finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 5.180 kg.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features

Luminous flux (source)	3100 lm
Colour temperature	2950 K
Colour rendering index	100 Ra