




Table Lamps | 220-240 V | topLED 9 W 325 mA | CRI 90
7112

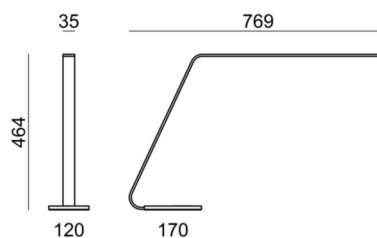

Technical data	
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	9 W
Luminous flux (source)	624 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
AC / DC	AC-DC
Safety class	2
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	Touch
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1.60 m
Electric socket	Type C
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating
Finishing diffuser	
Material	PC
Colour	opaline

Table Lamps | 220-240 V | topLED 9 W 325 mA | CRI 90
7112

Single emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 35 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 624 lm, with a 69.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.


The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.05 kg. The power supply driver is included in the delivery.

The total absorbed power is 9 W. The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	59 %
Luminous flux (source)	624 lm
Luminaire luminous flux	371 lm
Consumption	9 W
Luminaire efficacy	41 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

OPTICAL	
Light distribution simmetry	Asymmetrical
Optica C90/C270	111°

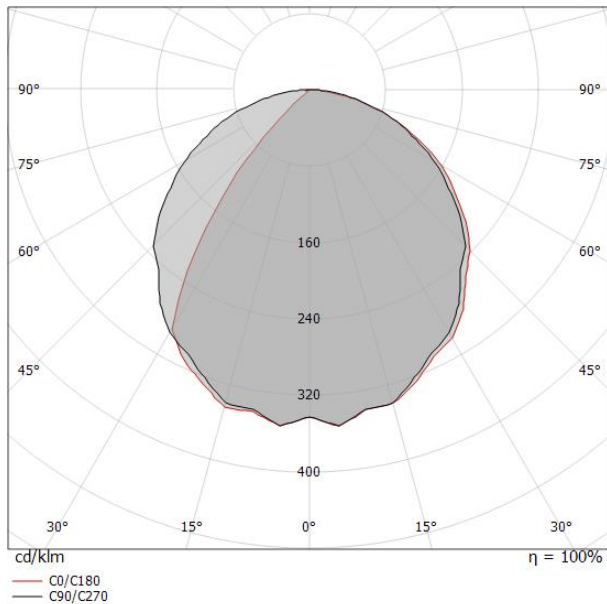

0.5	1.53	E(0°) E(C90)	56.8°	508 41
1.0	3.06	E(0°) E(C90)	56.8°	127 10
1.5	4.58	E(0°) E(C90)	56.8°	56 5
2.0	6.11	E(0°) E(C90)	56.8°	32 3
2.5	7.64	E(0°) E(C90)	56.8°	20 2
3.0	9.17	E(0°) E(C90)	56.8°	14 1

Distance [m] Cone diameter [m] Illuminance [lx]

— C90/C270 (Half-peak divergence: 113.6°)