


Wall_W1



Wall Lights | 1xGY6.35
51044



69



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Lamp cap	1 x GU4 Max
Optic	Diff. + Diff.
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	White RAL 9003
Processing	Coating

Electronics	
Multi Power	57350



Wall Lights | 1xGY6.35 51044

Single emission wall lights for indoor application. Compatibility: low-voltage halogen 35 W; lamp cap 1xGY6.35.

The device body is made of aluminium and features a white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.13 kg. The power supply driver is not provided and is to be ordered separately.


The device features protection class III and can be wall lights or ceiling-mounted, with a 69 x 69 mm hole (in plasterboard) with an outer casing, code 52840(for concrete or masonry).

Illuminotechnical Features

Light Output Ratio (LOR)	81 %
Luminous flux (source)	1060 lm
Luminaire luminous flux	860 lm
Consumption	35 W
Luminaire efficacy	24 lm/W
Colour temperature	2900 K
Colour rendering index	100 Ra

UGR

X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	< 25

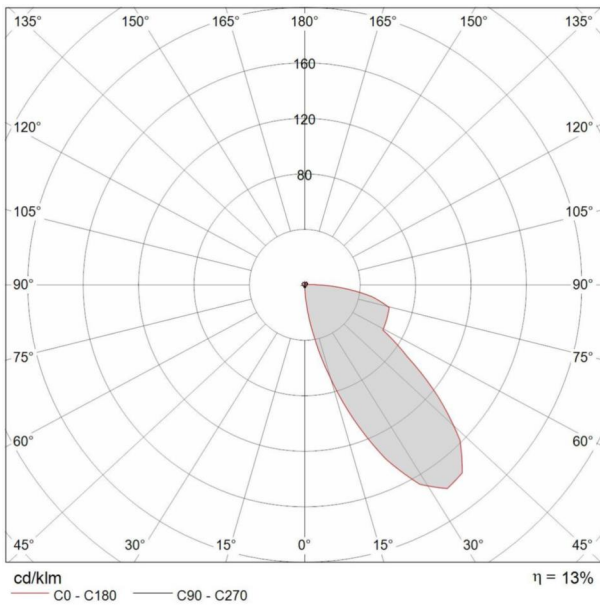



Wall_W1 | Wall Lights | Accessories
51044



Outer casing
L=75mm, H=135mm, D=75mm

Code
52840