




Ceiling Lights | 220-240 V | 3xE27  
7472

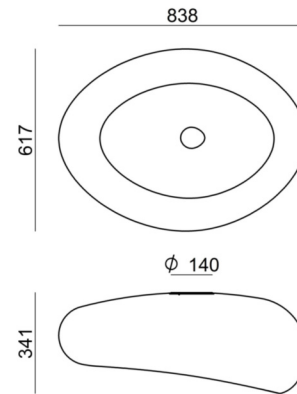

Technical data	
Designer	Lorenzo Antonioni
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	3 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	6.020 Kg

Finishing diffuser	
Material	PMMA - PE
Colour	translucent prismatic - neutral

## Ceiling Lights | 220-240 V | 3xE27 7472

Double emission ceiling lights for indoor application. Compatibility: LED lamp, compact fluo 20 W, halogen 46 W; lamp cap 3xE27.


The diffuser is made of pe the diffuser is made of pmma. The ingress protection degree is IP40; the total weight is of 6.020 kg.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	81 %
Luminous flux (source)	2100 lm
Luminaire luminous flux	1719 lm
Consumption	138 W
Luminaire efficacy	15 lm/W
Colour temperature	2500 K
Colour rendering index	100 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	102°
Ottica C90/C270	105°

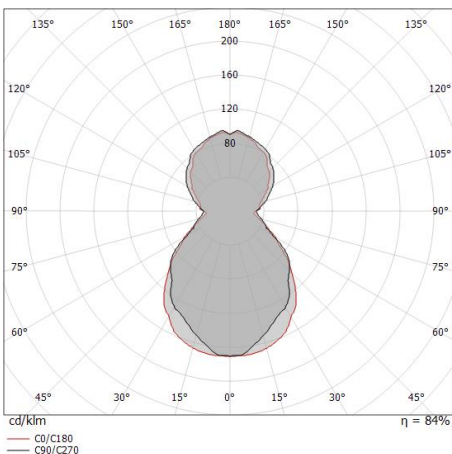

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.29 1.23	1432	52.3° 164	50.9° 180
1.0	2.59 2.46	358	52.3° 41	50.9° 45
1.5	3.88 3.69	159	52.3° 18	50.9° 20
2.0	5.18 4.92	90	52.3° 10	50.9° 11
2.5	6.47 6.15	57	52.3° 7	50.9° 7
3.0	7.76 7.38	40	52.3° 5	50.9° 5

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 101.8°)  
— C90/C270 (Half-peak divergence: 104.6°)