




| 220-240 V | 3xE27
7521

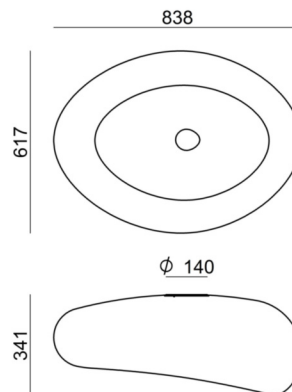

Technical data	
Designer	Lorenzo Antonioni
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	3 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	6.020 Kg

Finishing diffuser	
Material	PMMA - PE
Colour	copper - neutral
Processing	Coating

Finishing mounting frame	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating



| 220-240 V | 3xE27
7521

Double emission ceiling lights for indoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 3xE27.

The diffuser is made of pe the diffuser is made of pmma with a coating treatment; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 6.020 kg.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	100 %
Luminous flux (source)	2100 lm
Luminaire luminous flux	1760 lm
Consumption	138 W
Luminaire efficacy	12 lm/W
Colour temperature	2500 K
Colour rendering index	100 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	180°