




Pendant Luminaires | 220-240 V | 3xE27  
7473

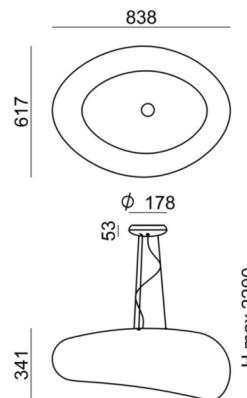

Technical data	
Designer	Lorenzo Antonioni
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	3 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	6.020 Kg

Finishing diffuser	
Material	PMMA - PE
Colour	translucent prismatic - neutral

Finishing mounting frame	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

## Pendant Luminaires | 220-240 V | 3xE27 7473

Double emission pendant luminaires for indoor application. Compatibility: LED lamp, compact fluo 20 W, halogen 46 W; lamp cap 3xE27.


The diffuser is made of pe the diffuser is made of pmma; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 6.020 kg.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	81 %
Luminous flux (source)	2100 lm
Luminaire luminous flux	1719 lm
Consumption	138 W
Luminaire efficacy	15 lm/W
Colour temperature	2500 K
Colour rendering index	100 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	102°
Ottica C90/C270	105°

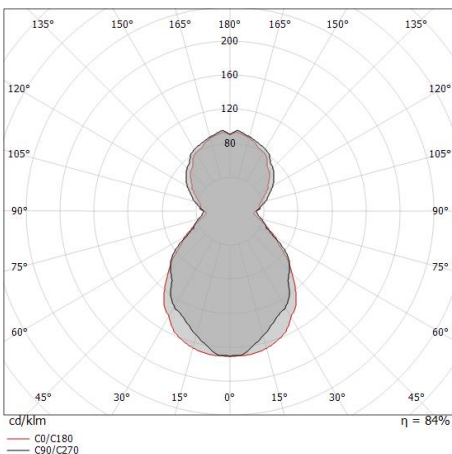

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.29 1.23	E(0°) 1432 E(C90) 52.3° 164 E(C0) 50.9° 180
1.0	2.59 2.46	E(0°) 358 E(C90) 52.3° 41 E(C0) 50.9° 45
1.5	3.88 3.69	E(0°) 159 E(C90) 52.3° 18 E(C0) 50.9° 20
2.0	5.18 4.92	E(0°) 90 E(C90) 52.3° 10 E(C0) 50.9° 11
2.5	6.47 6.15	E(0°) 57 E(C90) 52.3° 7 E(C0) 50.9° 7
3.0	7.76 7.38	E(0°) 40 E(C90) 52.3° 5 E(C0) 50.9° 5

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 101.8°)  
— C90/C270 (Half-peak divergence: 104.6°)