




Ceiling Lights | 220-240 V | topLED 39 W 1000 mA | CRI 90
8128



| Technical data | |
|--|---------------------|
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward and upward |
| Power | 39 W |
| Luminous flux (source) | 5158 lm |
| Frequency | 60 - 50 Hz |
| CCT / Tonaltà | 3000 K |
| Colour rendering index | 90 Ra |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Driver included | Yes |
| Dimmable article | Phase cut |
| Induzione | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |

| Finishing casing | |
|------------------|----------|
| Material | Wood |
| Colour | white |
| Processing | melamine |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |



Ceiling Lights | 220-240 V | topLED 39 W 1000 mA | CRI 90
8128

Double emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 96 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5158 lm, with a 132.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of wood and features a white finish, processed by means of melamine; the diffuser is made of pe. The ingress protection degree is IP20; the total weight is of 8.010 kg. The power supply driver is included in the delivery.



The total absorbed power is 39 W.

The device features protection class I and can be ceiling-mounted.

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 47 % |
| Luminous flux (source) | 5158 lm |
| Luminaire luminous flux | 2458 lm |
| Consumption | 39 W |
| Luminaire efficacy | 63 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Life / Failure ratio | L80C0B20 |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 19 |
| UGR axial | < 16 |

| OPTICAL | |
|-----------------------------|---------------|
| Light distribution simmetry | Symmetrical 2 |
| Ottica C0/C180 | 123° |
| Ottica C90/C270 | 120° |

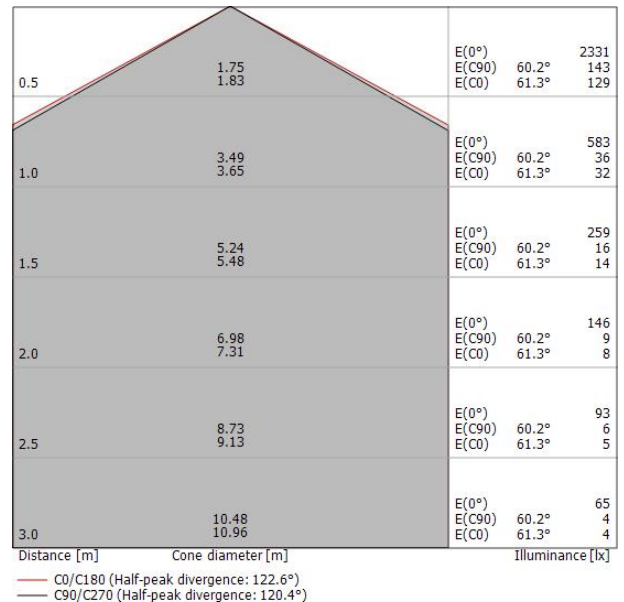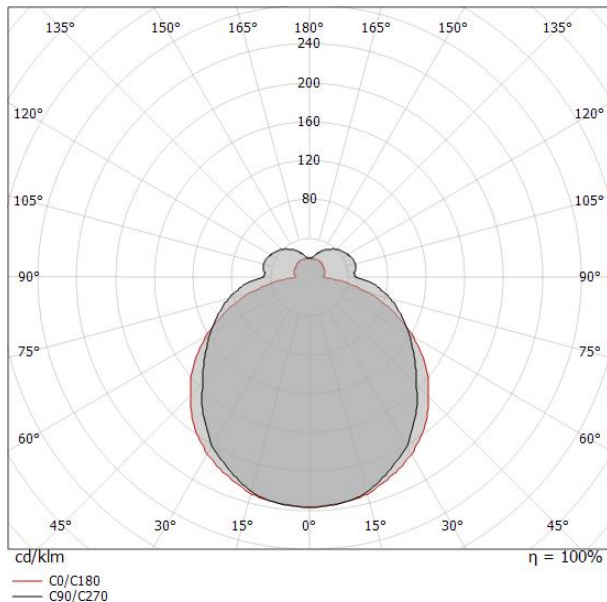



Square_SB | Ceiling Lights | Accessories
8128



Dimmer
PUSH DIM, 220-240V

Code
KIT0026



Dimmer
Bluetooth, 85-240V

Code
KIT0080