




Wall Lights | topLED 38 W | CRI 90
7741



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Power	38 W
Luminous flux (source)	3060 lm
Tensione	-----V
Frequency	50-60 Hz
CCT / Tonaltà	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	PU
Colour	white

Finishing diffuser	
Material	PC
Processing	Sandblasting

Wall Lights | topLED 38 W | CRI 90
7741


Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 80 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3060 lm, with a 80.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of pu and features a white finish; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 1.015 kg.

The total absorbed power is 38 W.


The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	69 %
Luminous flux (source)	3060 lm
Luminaire luminous flux	2131 lm
Consumption	38 W
Luminaire efficacy	56 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20 80H

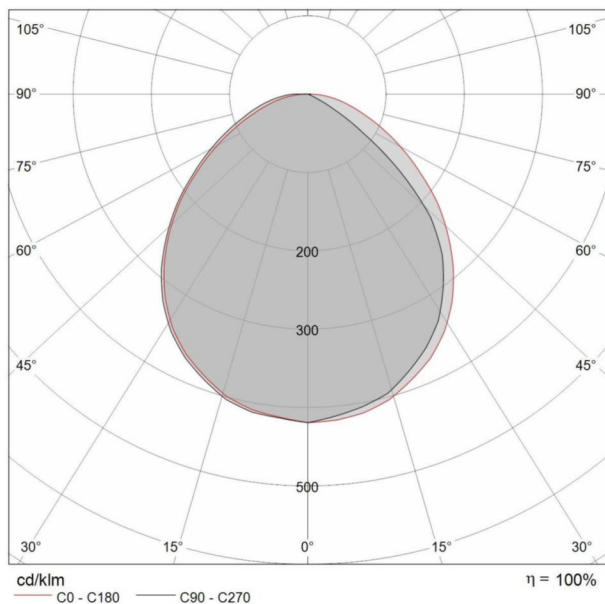



Kyklos_W | Wall Lights | Accessories
7741



Dimmer
PUSH DIM, 220-240V

Code
KIT0026