




Ceiling Lights | 220-240 V | 5xE14  
4429

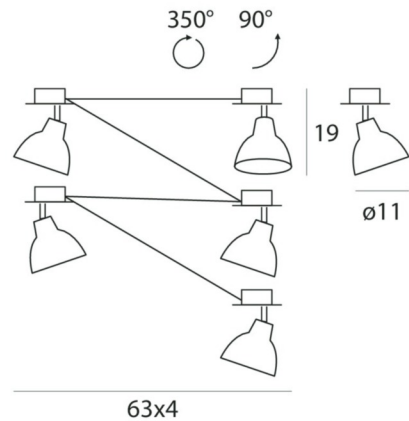

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	5 x E14 Max 30W
Frequency	50-60 Hz
Optic	Diff. + Diff. + Diff.
Light emission direction	downward
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Yes
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	Glass
Colour	white
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Colour	nickel
Processing	Electroplating



Ceiling Lights | 220-240 V | 5xE14  
**4429**

Single emission ceiling lights for indoor application. Compatibility: LED lamp, compact fluo 8 W, halogen 30 W; lamp cap 5xE14.

The diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a nickel finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 3.315 kg.

The device features protection class I and can be ceiling-mounted.

<b>Illuminotechnical Features</b>	
Luminous flux (source)	4175 lm
Colour temperature	2500 K
Colour rendering index	100 Ra