




Wall Lights | 220-240 V | 1xR7s
1002



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Power	1 x 80 W
Lamp cap	1 x R7s
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	frontal
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.600 Kg

Finishing casing	
Material	Iron
Colour	nickel
Processing	Electroplating

Finishing diffuser	
Material	Glass
Colour	transparent
Processing	Silk-screening

Finishing mounting frame	
Material	Iron
Colour	white
Processing	Coating

Wall Lights | 220-240 V | 1xR7s 1002


Double emission wall lights for indoor application. Halogen lamp included 80W, lamp cap 1xR7s.

The device body is made of iron and features a nickel finish, processed by means of electroplating; the diffuser is made of glass with a silk-screening treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.600 kg.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	67 %
Luminous flux (source)	1400 lm
Luminaire luminous flux	939 lm
Consumption	80 W
Luminaire efficacy	17 lm/W
Colour temperature	2950 K
Colour rendering index	100 Ra

OPTICAL	
Light distribution symmetry	Asymmetrical
Optica C90/C270	116°

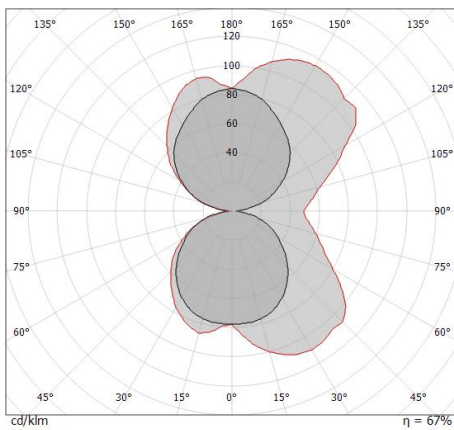

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	5.67	E(0°) 435 E(C90) 0
1.0	11.34	E(0°) 109 E(C90) 0
1.5	17.01	E(0°) 48 E(C90) 0
2.0	22.69	E(0°) 27 E(C90) 0
2.5	28.36	E(0°) 17 E(C90) 0
3.0	34.03	E(0°) 12 E(C90) 0

— C90/C270 (Half-peak divergence: 160.0°)