




220-240 V | topLED 28 W 700 mA | CRI 80  
8774

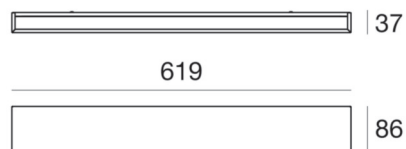

| Technical data                                 |                  |
|------------------------------------------------|------------------|
| Installation position                          | Wall lights      |
| Installation environment                       | Indoor           |
| Light Source                                   | LED              |
| Optics                                         | General Lighting |
| Light emission direction                       | downward         |
| Power                                          | 28 W             |
| Luminous flux (source)                         | 3390 lm          |
| Frequency                                      | 60 - 50 Hz       |
| CCT / Tonaltà                                  | 3000 K           |
| Colour rendering index                         | 80 Ra            |
| Safety class                                   | 1                |
| IP                                             | IP40             |
| Glow wire test                                 | 650°             |
| Direct mounting on normally flammable surfaces | No               |
| CE                                             | No               |
| ETL                                            | No               |
| Driver included                                | Yes              |
| Dimmable article                               | Phase cut        |
| Induzione                                      | No               |
| Emergency mode                                 | No               |
| Motion sensor                                  | No               |
| Directional                                    | No               |
| Tilting                                        | No               |
| Walk-over                                      | No               |
| Drive-over                                     | No               |
| Cable included                                 | No               |
| Resin potting                                  | No               |
| Net weight                                     | 1 Kg             |

| Finishing diffuser |         |
|--------------------|---------|
| Material           | PMMA    |
| Colour             | opaline |

| Finishing mounting frame |                         |
|--------------------------|-------------------------|
| Material                 | Iron                    |
| Colour                   | embossed white RAL 9003 |
| Processing               | Coating                 |



220-240 V | topLED 28 W 700 mA | CRI 80  
**8774**

Double emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 72 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3390 lm, with a 121.1 lm/W nominal luminous efficacy and an operating lifetime (L70) of 72.5000 hours.

The diffuser is made of pmma; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1 kg. The power supply driver is included in the delivery.

The total absorbed power is 28 W.

The device features protection class I and can be wall lights-mounted.

#### **Illuminotechnical Features**

|                                       |                |
|---------------------------------------|----------------|
| Luminous flux (source)                | 3390 lm        |
| Colour temperature                    | 3000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index                | 80 Ra          |
| Life / Failure ratio                  | L70C0B20 72.5H |



Box\_W1 | Wall Lights | Accessories  
8774



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026