




Pendant Luminaires | 220-240 V | topLED 23 W 500 mA | DALI | CRI 90  
8005



Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	23 W
Luminous flux (source)	2794 lm
Frequency	50 - 60 Hz
CCT / Tonaltà	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	DALI
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating



Pendant Luminaires | 220-240 V | topLED 23 W 500 mA | DALI | CRI 90  
8005

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 104 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2794 lm, with a 121.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of pe; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.220 kg. The power supply driver is included in the delivery.



The total absorbed power is 23 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	60 %
Luminous flux (source)	2794 lm
Luminaire luminous flux	1684 lm
Consumption	23 W
Luminaire efficacy	73 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	117°
Ottica C90/C270	110°

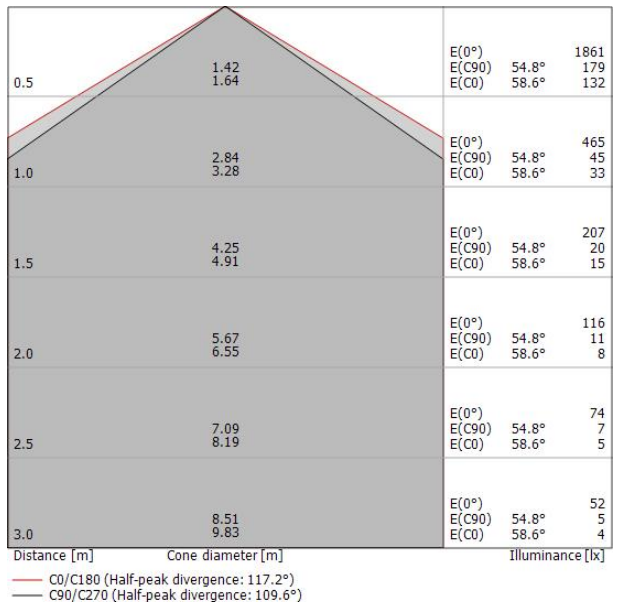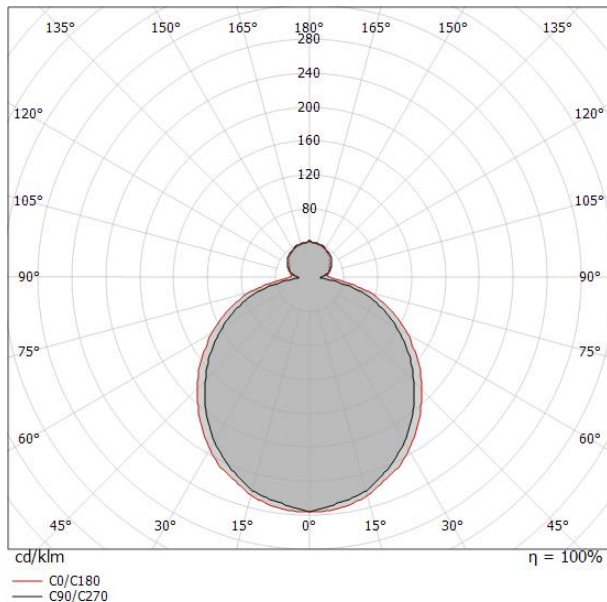



Mr.Magoo\_P | Pendant Luminaires | Accessories  
**8005**

---



Dimmer  
Bluetooth, 220-240V

**Code**  
KIT0079

---