



# Oh!\_FL65

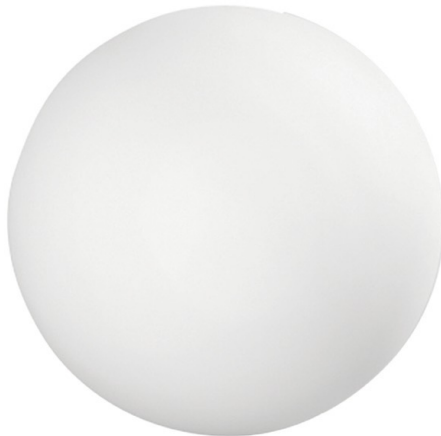

Floor Lamp | topLED 8 W 350 mA | CRI 80  
**15190**



Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Light emission direction	upward
Power	8 W
Luminous flux (source)	1002 lm
Current intensity	350mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Type of light emission	Double emission
Net weight	1.440 Kg

Finishing diffuser	
Material	PE
Colour	neutral

Floor Lamp | topLED 8 W 350 mA | CRI 80  
**15190**

Double emission floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1002 lm, with a 125.3 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 1.440 kg. The power supply driver is not provided and is to be ordered separately.


The total absorbed power is 8 W. The power supply cable is included and features.


The device features protection class III and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	84 %
Luminous flux (source)	1002 lm
Luminaire luminous flux	847.06 lm
Consumption	8 W
Luminaire efficacy	105 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 19


OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	178°

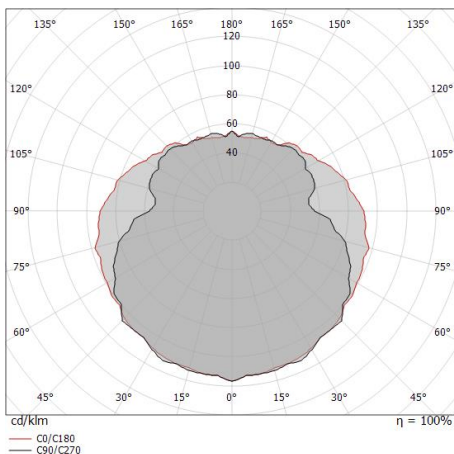




Outer casing - outer casing for installation on ground or on concrete

**Code**  
14930



Pegs

**Code**  
14931



Power supply

**Code**  
KIT0066