




Ceiling Lights | 220-240 V | topLED 10 W 500 mA | CRI 90  
**90281**



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	10 W
Source lumens	1008 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission

Finishing diffuser	
Material	Glass
Colour	transparent

## Ceiling Lights | 220-240 V | topLED 10 W 500 mA | CRI 90 90281

Single emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 18 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1008 lm, with a 100.8 lm/W nominal luminous efficacy.

The diffuser is made of glass; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40;

The total absorbed power is 10 W.

The device features protection class I and can be ceiling-mounted.

### Illuminotechnical Features

Light Output Ratio (LOR)	51 %
Source lumens	1008 lm
Delivered lumens	515.1 lm
Consumption	10 W
Luminaire efficacy	51 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

### LED Life / Failure Ratio


L80 B20 C0 80000h
-------------------

### UGR

X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 25

### OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	109°

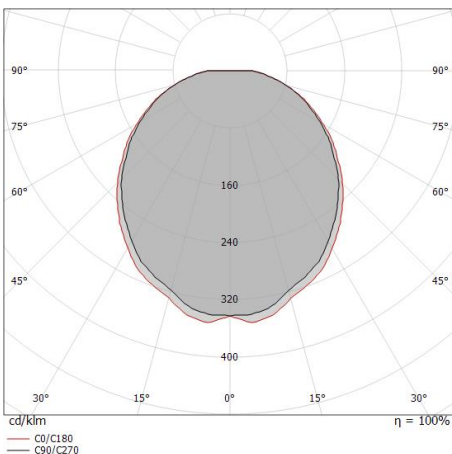

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.41	705	54.6°	69	70
1.0	2.81	176	54.6°	17	18
1.5	4.22	78	54.6°	8	8
2.0	5.63	44	54.6°	4	4
2.5	7.04	28	54.6°	3	3
3.0	8.44	20	54.6°	2	2

— C0/C180 (Half-peak divergence: 109.4°)  
 — C90/C270 (Half-peak divergence: 109.2°)