




Ceiling Lights | 220-240 V | topLED 26 W 700 mA | CRI 90
8260N

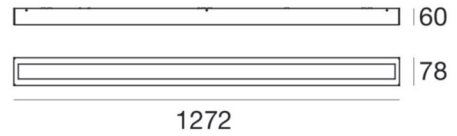

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	26 W
Luminous flux (source)	3523 lm
Frequency	60 - 50 Hz
CCT / Tonalità	4000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Dimmable article	Phase cut
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PMMA
Colour	opaline
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	zinc
Processing	Washing

Ceiling Lights | 220-240 V | topLED 26 W 700 mA | CRI 90
8260N

Single emission ceiling lights for indoor application. The natural white LED light source with a general lighting light distribution is composed of 72 topped LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 3523 lm, with a 135.5 lm/W nominal luminous efficacy and an operating lifetime (L70) of 72.5000 hours.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a zinc finish, processed by means of washing. The ingress protection degree is IP40; The power supply driver is included in the delivery.


The total absorbed power is 26 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	64 %
Luminous flux (source)	3523 lm
Luminaire luminous flux	2255 lm
Consumption	26 W
Luminaire efficacy	86 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L70C0B20 72.5H

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Asymmetrical
Optica C0/C180	129°
Optica C90/C270	110°

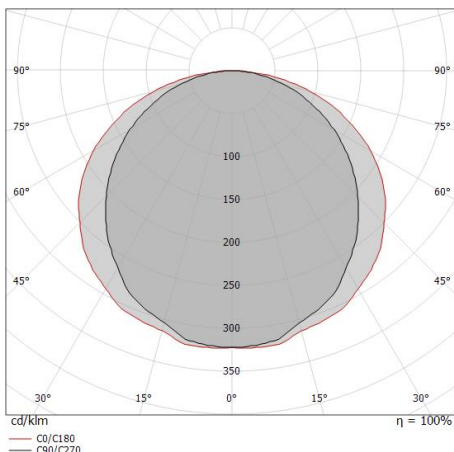

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.43 2.09	2909	275	118
1.0	2.86 4.17	727	69	29
1.5	4.28 6.26	323	31	13
2.0	5.71 8.35	182	17	7
2.5	7.14 10.44	116	11	5
3.0	8.57 12.52	81	8	3

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 128.8°)
 — C90/C270 (Half-peak divergence: 110.0°)



Box_SB | Ceiling Lights | Accessories
8260N



Dimmer
PUSH DIM, 220-240V

Code
KIT0026